




Catalog Number 73025
UPC Number 60198673025
Description Exit Sign
LED
Remote Capable
Red Letters White Housing

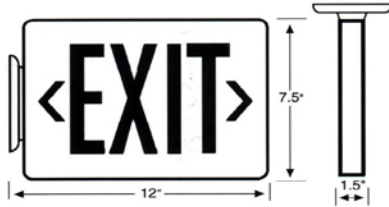

Features

- Superior Quality Exit Unit Combined with LED Energy Saving Technology
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Design in Neutral Finish
- Push to Test Switch in Battery Backup Units
- Automatic, Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Injection-Molded, UL 94 V-0 Flame Retardant, High Impact Housing
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 4 Watts for Red Letters and Less than 2 Watts for Green Letters
- Listed for Damp Location
- Universal Mounting Canopy & 2 Face Plates for Side or Top Installation
- Standard AC and Emergency Units Available
- 700MAH 4.8V Ni-CAD Battery On Battery Backup Units
- Remote Capable
- 4 Lamps 90 Minute Battery Run Time
3 Lamps 120 Minute Battery Run Time
2 Lamps 180 Minute Battery Run Time

Dimension Information

| | |
|-------------------|-------|
| L Inches | 12.00 |
| H Inches | 7.50 |
| Depth Inches (mm) | 1.50 |

Specifications

| | |
|----------------------|--|
| Input Rating Amps: | 18.1 mA @120V, 7.76 mA @ 277V |
| Input Rating Watts: | 1.64W @ 120V 1.60W @ 277V |
| Frequency: | 60 Hz |
| Voltage Rating: | 120/277 |
| Flammability Rating: | UL94V-0 |
| Battery Operation: | 4.8 Volt 4.5 AH Lead Acid - 90 Minutes Min |

Packaging

| | |
|-------------------|---|
| Box Qty | 1 |
| Master Carton Qty | 6 |

Certifications

| | |
|------|--------|
| UL | UL 924 |
| cUL | No |
| RoHS | Yes |