




Catalog Number 73028
UPC Number 60198673028
Description Exit Sign
LED
2 Circuit
Red Letters White Housing

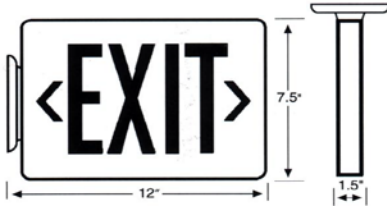

Features

- Superior Quality Exit Unit Combined with LED Energy Saving Technology
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Design in Neutral Finish
- Push to Test Switch in Battery Backup Units
- Automatic, Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Injection-Molded, UL 94 V-0 Flame Retardant, High Impact Housing
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 4 Watts for Red Letters and Less than 2 Watts for Green Letters
- Listed for Damp Location
- Universal Mounting Canopy & 2 Face Plates for Side or Top Installation
- Standard AC and Emergency Units Available
- 700MAH 4.8V Ni-CAD Battery On Battery Backup Units
- 2 Circuit Wiring for AC To DC Backup Generator

Dimension Information

L Inches	12.00
H Inches	7.50
Depth Inches (mm)	1.50

Specifications

Input Rating Amps:	18.1 mA @120V, 7.76 mA @ 277V
Input Rating Watts:	1.64W @ 120V 1.60W @ 277V
Frequency:	60 Hz
Voltage Rating:	120/277
Flammability Rating:	UL94V-0
Battery Operation:	4.8 Volt 4.5 AH Lead Acid - 90 Minutes Min

Packaging

Box Qty	1
Master Carton Qty	6

Certifications

UL	UL 924
cUL	No
RoHS	Yes