




**Catalog Number** 73024  
**UPC Number** 60198673024  
**Description** Exit Sign  
LED  
Remote Capable  
Red Letters White Housing

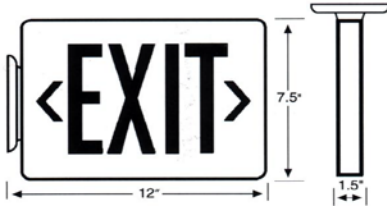

#### Features

- Superior Quality Exit Unit Combined with LED Energy Saving Technology
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Design in Neutral Finish
- Push to Test Switch in Battery Backup Units
- Automatic, Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Injection-Molded, UL 94 V-0 Flame Retardant, High Impact Housing
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 4 Watts for Red Letters and Less than 2 Watts for Green Letters
- Listed for Damp Location
- Universal Mounting Canopy & 2 Face Plates for Side or Top Installation
- Standard AC and Emergency Units Available
- 700MAH 4.8V Ni-CAD Battery On Battery Backup Units
- Remote Capable
- 4 Lamps 90 Minute Battery Run Time  
3 Lamps 120 Minute Battery Run Time  
2 Lamps 180 Minute Battery Run Time

#### Dimension Information

|                   |       |
|-------------------|-------|
| L Inches          | 12.00 |
| H Inches          | 7.50  |
| Depth Inches (mm) | 1.50  |

#### Specifications

|                      |  |
|----------------------|--|
| Input Rating Amps:   | 18.1 mA @120V, 7.76 mA @ 277V              |
| Input Rating Watts:  | 1.64W @ 120V 1.60W @ 277V                  |
| Frequency:           | 60 Hz                                      |
| Voltage Rating:      | 120/277                                    |
| Flammability Rating: | UL94V-0                                    |
| Battery Operation:   | 4.8 Volt 4.5 AH Lead Acid - 90 Minutes Min |

#### Packaging

|                   |   |
|-------------------|---|
| Box Qty           | 1 |
| Master Carton Qty | 6 |

#### Certifications

|      |        |
|------|--------|
| UL   | UL 924 |
| cUL  | No     |
| RoHS | Yes    |