


2 6P6C RJ-11 Voice Wall Plate

PRODUCT SPECIFICATION


Package includes:

- A. 2 6P6C Voice Wall Plate, 1 pc
- B. #6-32 x 3/4" Oval Head, Countersink Machine Screw, 2 pcs

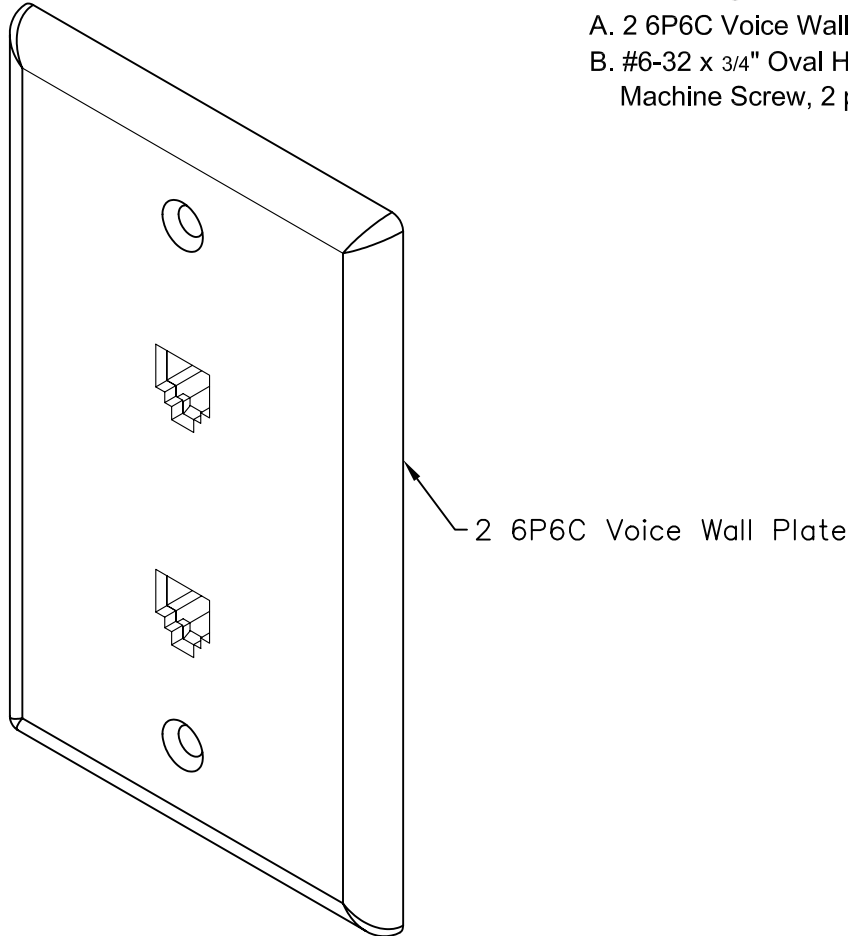


Features and Benefits:

- Configured to fit standard single gang outlet box
- Designed for all voice connectivity to the work area for commercial or residential applications
- Provides with traditional screw down terminals for voice connectivity on the rear
- Rugged and durable construction
- Used with ICLC2, ICLC4, and ICLC6 line cords
- Available in ivory and white
- UL listed

WALL PLATE, 2 VOICE 6P6C		 <i>PremiumProducts</i> <i>ProvenPerformance</i> <i>CompetitivePrices</i>	
ITEM NO.	IC630E66XX		REV. A
DWG NO.	PS630E6600		PAGE NO. 1

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

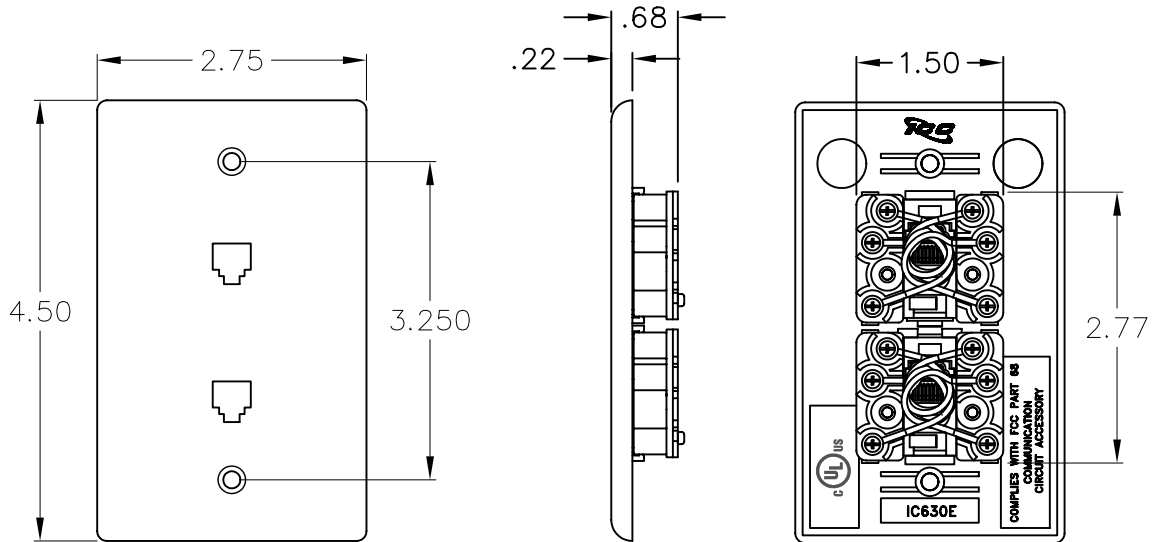

NOTE: UNLESS OTHERWISE SPECIFIED

1. FACEPLATE:

- A. MATERIAL: ABS, UL 94V-0
- B. COLOR: XX: IV-IVORY & WH-WHITE

2. WIRING BLOCK:

A. MATERIAL & FINISH:

- HOUSING: ABS, UL 94V-0
- SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING
OVER 100 MICRO INCH NICKEL
- GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
- WIRE LEADS: 26 AWG STRANDED WIRE
- TERMINATION SCREWS: #6-20 X .415 FLAT PAN HEAD
TAPPING SCREWS WITH TWO WASHERS
15 LBS/INCH MIN TORQUE
ZINC CHROMATIC PLATED STEEL


-TERMINATION LUGS: BRASS

B. ELECTRICAL:

- CURRENT RATING: 1.5 AMP MAX
- DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VOLTS RMS, 60 Hz
- CONTACT RESISTANCE: < 20 MILLIOHMS
- INSULATION RESISTANCE: > 10 MEGAOHMS
- PERFORMANCE: RETURN LOSS OF -20 dB MAX
FREQUENCY RANGE DC -1.5 GHz

C. MECHANICAL:

- TOTAL MATING FORCE: 500 GRAMS FOR 6 WIRES LEAD
- RETENTION: 17 LBS BETWEEN JACK AND PLUG
- CRIMP TENSILE STRENGTH: 4.0-500 LBS

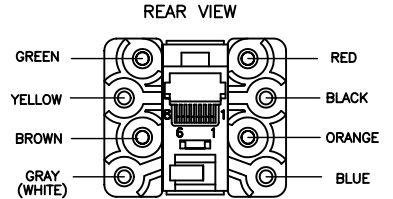

WIRING DIAGRAM

JACK POSITION	WIRE COLOR
	6 COND.
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

UL US FILE NO. 125268

WALL PLATE, 2 VOICE 6P6C		ICC <i>Premium Products</i> <i>Proven Performance</i> <i>Competitive Prices</i>	
ITEM NO.	IC630E66XX		REV. A
DWG NO.	PS630E6600		PAGE NO. 2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com